

Stain Resist And The Articl

1/3

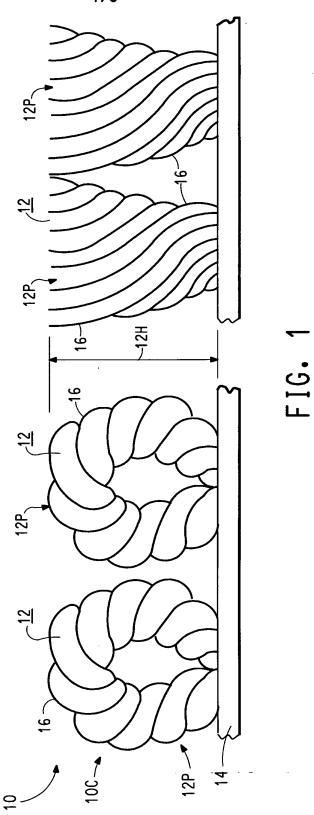

KCCTCHOT CITCE

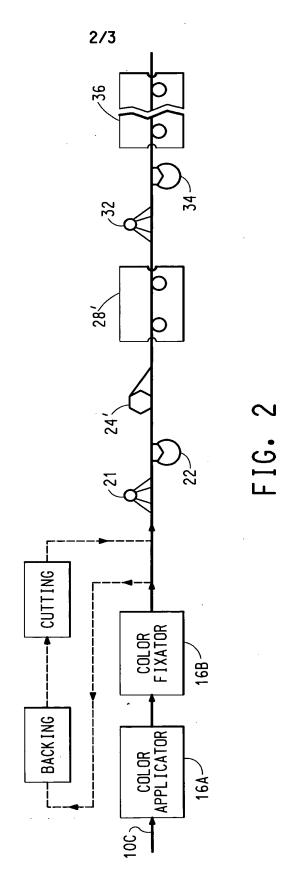

Docket No: RD-8025 UTitle: A Method Inventor: Baumann Unknown E.I. DuPont de Nemours

3/3

CONVENTIONAL PROCESS: Plain colors and prints

DYEING/PRINTING

IN-LINE TREATMENT: RINSE/HYDROEXTRACT

SEPARATE RUN: PREWET

STAIN RESIST APPLICATOR

KÜSTERS FLUIDYER FLEISSNER QUICK CHANGE APPL

APPLICATION BATH:

STAINBLOCKER SURFACTANT ACID DONOR

STAINBLOCKER A: pH 2.0-5.0 STAINBLOCKER B: pH 6.0-7.5 20-60°C

STEAMER

SATURATED STEAM 60 TO 90 SECONDS

(HYDRO EXTRACTOR)


RINSE


HYDRO EXTRACTOR

DRY

CARPET TILES AND CARPETS:

Dif Dye Carpet Tiles and Carpets, Plain or Printed Carpet Tiles and Carpets.





STAIN RESIST APPLICATOR
Tiles: Flood Applicator
Carpets: Any

APPLICATION BATH:

STAINBLOCKER SURFACTANT ACID DONOR pH 6.0-7.5 20-95°C

DRYING

Infra-red dryer

32—RINSING

34 SUCTIONING

36 DRYING

FIG. 3